

POWERSUPPLIES

GPE 152, Switching adapter 15W



- CEC efficiency regulation compliance
- Very compact size
- Short circuit protection
- International approvals

Technical data:


Input:

Input voltage:	90-264VAC
Frequency:	47-63 Hz
Input current:	0.5A max
Inrush current:	50A max

Output:

Output voltage:	See below table
Output current:	See below table
Isolation class:	II
Line regulation 90-264V:	<2%
Load regulation 0-100% load:	<5%
Ripple&noise:	1%
Efficiency:	70-80%
Short circuit protection:	Auto recovery
Temperature range:	0°C...+40°C
Plug and cable:	1.8m/6ft cable, AWG20 All kind of DC plugs are available
Size:	68x46.5x27 mm
Weight:	110g
Safety and EMC:	TÜV/GS/UL/CUL/CCC/PSE/SAA/CE/CB/FCC

Mechanical drawing:

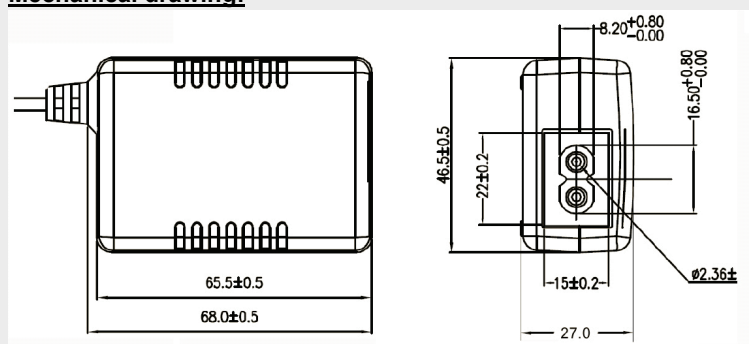

Ordering information:

Type	Power	Output voltage	Output Current
GPE152-030XXW	1.5 ~ 7.5 W	3 VDC	0.5 ~ 2.5 A
GPE152-040XXW	2.25 ~ 11.25 W	4.5 VDC	0.5 ~ 2.5 A
GPE152-050XXW	2.5 ~ 12.5 W	5 VDC	0.5 ~ 2.5 A
GPE152-060XXW	3.0 ~ 15 W	6 VDC	0.5 ~ 2.5 A
GPE152-070XXW	3.75 ~ 15 W	7.5 VDC	0.5 ~ 2.0 A
GPE152-090XXW	4.5 ~ 14.4 W	9 VDC	0.5 ~ 1.6 A
GPE152-100XXW	5.0 ~ 15 W	10 VDC	0.5 ~ 1.5 A
GPE152-120XXW	4.8 ~ 15 W	12 VDC	0.4 ~ 1.25 A
GPE152-130XXW	6.5 ~ 14.3 W	13 VDC	0.5 ~ 1.1 A
GPE152-150XXW	7.5 ~ 15 W	15 VDC	0.5 ~ 1.0 A
GPE152-180XXW	7.2 ~ 14.4 W	18 VDC	0.4 ~ 0.8 A
GPE152-200XXW	10 ~ 15 W	20 VDC	0.5 ~ 0.75 A
GPE152-220XXW	11 ~ 14.3 W	22 VDC	0.5 ~ 0.65 A
GPE152-240XXW	7.2 ~ 14.4 W	24 VDC	0.3 ~ 0.6 A

For complete adapter, Specified voltage and DC plug with polarity must be given. XX=60 is 600mA